

Specifications

Environment	3G-SDI, HD-SDI & SD-SDI.
Devices	Camera, projectors, monitors, TV.
Transmission	Transparent to the user.
Detection	Auto Detection of the 3G/HD/SD-SDI Signal.
Bandwidth	2.97Gbps & 2.97/1,001Gbps
Data Rates	270,1483 and 1485Mbps
Output Impedance	75Ω
Signals	SDI protocol.
Supported Resolution	3G-SDI: 1080p50/59.94/60Hz (4:2:2) HD-SDI: 1080p/23.98/24/25/29.97/30Hz 720p/50/59.94/60Hz 1080i/50/59.94/60Hz SD-SDI: NTSC (59.94Hz), PAL (50Hz)
Audio	Up to 8 Audio Channels.
Ancillary Data	Supported
Input Signal	3G-SDI: SMPTE 424M, 425M HD-SDI: SMPTE 292M, 296M SD-SDI : SMPTE 259M, 344M
Connectors	One (1) BNC Female 75 Ohms, Gold Plated for input. four (4) BNC Female 75 Ohms, Gold Plated for outputs. One (1) Locking Barrel Jack 2.1mm Power Connector. <i>Note: RG59 coaxial cables not included.</i>
Cable Equalization	3G-SDI up to 300ft (90m) HD-SDI up to 500ft (150m) SD-SDI up to 1000ft (300m)
Cable	RG-59 or better cable required.
Power Supply	One (1) 110-240V/5VDC power supply with interchangeable blades.
Power Consumption	10.0 Watt (Max)
Temperature	Operating: 0° to 40°C Storage: -20° to 60°C Humidity: Up to 90% non-condensing
Enclosure	Metal
Dimensions	4.1" x 3.1" x 1.1" (105mm x 78mm x 27mm)
Weight	0.7lbs (0.32kg)
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0
Warranty	2 years
Order Information	500719 3G-SDI 1x4 Splitter (UPC: 627699007198)



3G-SDI 1X4 Splitter 500719

Quick Installation Guide

Overview

The 3G-SDI 1x4 Splitter (500719) allows one (1) 3G/HD/SD-SDI source to be distributed and amplified to up to four (4) 3G/HD/SD-SDI displays. The splitter supports up to 1080p video, including 480i (SD-SDI), 720p/1080i (HD-SDI), and 1080p (3G-SDI). The device automatically detects the 3G/HD/SD-SDI signal and re-locks and regenerates the signal at the output for extending distances between source and displays.

Applications

Applications include video production, broadcasting, outside broadcasting vehicle, SDI camcorder, studio-to-studio, post production, live events, medical imaging display, mobile video.

Installation

1. Identify the connectors on the 3G-SDI 1x4 Splitter as indicated on the product labels above.
2. Connect the source to the 3G-SDI Input of the splitter.
3. Connect up to four (4) display(s) to the 3G-SDI Outputs of the splitter.




8495 Dalton Road, Mount Royal, Quebec, Canada. H4T 1V5
Tel: (514) 905-0588 Fax: (514) 905-0589
Toll Free (North America): (877) 689-5228
E-mail: videoease@muxlab.com URL: www.muxlab.com

- Connect the 5 VDC power supply to the splitter first, and then plug the power supply into an AC power outlet. If power is present, the blue power LED of the splitter will be illuminated.

Note: Power ON the 3G-SDI 1x4 Splitter only after all connections are made.

- Power the equipment and verify the image quality.
- The Sync LED will light up on a detection of a valid signal at the input. The Data Rate LED will be OFF for an SD-SDI signal, and ON for the other rates including HD-SDI and 3G-SDI.
- The following diagram shows the final configuration.

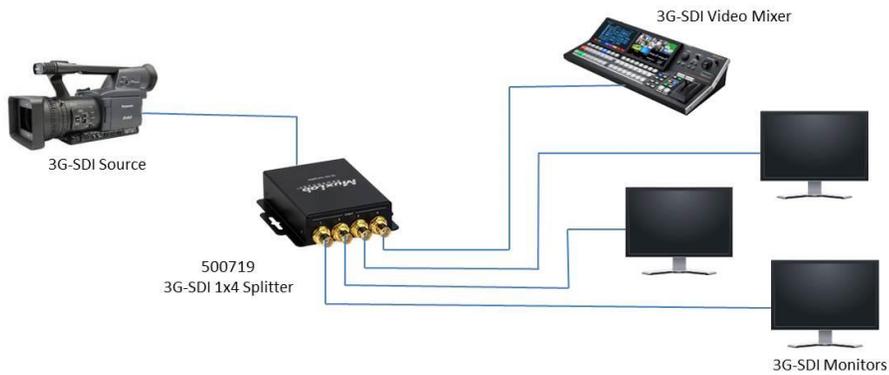

One 3G-SDI source may be connected to up to Four (4) 3G-SDI destination devices

Troubleshooting

The following table describes some of the symptoms, probable causes and possible solutions with respect to the installation of the 3G-SDI 1x4 Splitter:

Symptom	Probable Cause	Possible Solutions
No Image	No power	• Check power connections
No Image	Source	• Check if the source is sending a signal.
No Image	Resolution	• Check if the source resolution is valid.
No Image	Coaxial Cable	• Check the coaxial cable.
No Image	Coaxial Cable distance	• Check the coaxial cable distance for the corresponding resolution (see Specifications table).
No Image	Coaxial Cable Quality	• Check the coaxial cable type. It should be an RG-59 or better coaxial cable.
Flickering Image	Synchronization	• Check the coaxial Cable Quality or distance.
Choppy sound	Synchronization	• Check the coaxial Cable Quality or distance.

If you still cannot diagnose the problem, please call MuxLab Customer Technical Support at 877-689-5228 (toll-free in North America) or (+1) 514-905-0588 (International).