

Specifications

Specifications	
Video Input Connectors	1xHDMI Type A 19P Male Connector
Video Input Resolution	2540x1440@60Hz, 1920x1080@60Hz, 1280x720@60Hz
Format Compliance	HDMI 1.4
HDCP	HDCP 1.4
USB Interface	USB 2.0 x 1
Audio Input	HDMI PCM 2CH
Control Connector	USB HID (Touch back)
Video Playback Frame Rate	20-60 FPS
Latency	< 100ms
Wireless Transmission Protocol	WiFi IEEE 802.11 a/g/n/ac
Frequency Band	2.4 GHz & 5 GHz
WiFi Antenna	MIMO 2x2
Data Rate in Wireless	Up to 1200Mbps
Unit Dimension (DxWxH)	3.14" x 2.55" x 0.51" (80mm x 65mm x 13mm)
Unit Weight	0.2 lbs (0.09Kg)
Operating temperature	-20°C ~ +45°C (-4°F ~ +113°F)
Storage Temperature	-20°C ~ +60°C (-4°F ~ +140°F)
Relative Humidity	20% ~ 85% RH (No condensation)
DC Power	USB Internal 5V
Power Consumption	2.5W (MAX)
Warranty	Two (2) years
Order Information	500827 MuxMeet Share Dongle-H1 (UPC: 627699008270)
Accessories	MuxMeet Share Base-1 (model: 500826), and MuxMeet Share Base-2 (model: 500829)



MuxMeet Share Dongle-H1 (500827)

Quick Installation Guide

Overview

The MuxMeet Share Dongle-H1 (model: 500827) is an HDMI Dongle that enables meeting participants using Windows or MAC based laptops to wirelessly share content with the push of a button, making connecting and sharing desktop screens in a meeting a simple and enjoyable experience.

The MuxMeet Share Dongle-H1 is easy to connect and easy to use. Thanks to its plug-and-play connectivity, there is no need to install drivers. Sharing your desktop screen is as easy as pushing a button on the attached MuxMeet Share Dongle-H1, and an LED indicates the unit status. This device works in conjunction with MuxMeet Share Base-1 (model: 500826) or with MuxMeet Share Base-2 (model: 500829). MuxMeet Share Base-1 and MuxMeet Share Base-2 are sold separately.


Key Features

- Can be connected to a Windows or Mac based laptop
- Can wireless transmit your computer desktop to MuxMeet Share Base-1 (model: 500826) or MuxMeet Share Base-2 (model: 500829)
- Supports transmit the computer desktop in mirror or extend mode
- Supports VESA PC resolution, auto-detecting
- No driver installation required
- With the push of a button, it is possible to start or stop a transmission



2321 Rue Cohen, Montreal, Quebec, Canada, H4R 2N7
Tel: (514) 905-0588 Fax: (514) 905-0589
Toll Free (North America): (877) 689-5228
E-mail: info@muxlab.com URL: www.muxlab.com

Installation

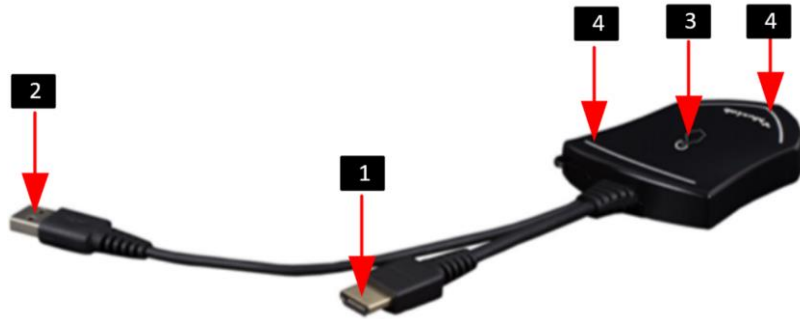

ID	Name	Description
1	HDMI connector	Plug it into the HDMI connector of a PC/Laptop to share your screen
2	USB connector	Plug it into the USB connector of a PC/Laptop to power the Dongle
3	Touch Button	Touch the button to start or stop streaming PC/Laptop screen content on the main screen.
4	LED indicator	Indicates the status of the Dongle.

LED indicator behavior

- When LED indicator is static green, it's ready to mirror your PC desktop on the main screen.
- When LED indicator is static red, it indicates:
 - 1) It's mirroring your PC desktop on the screen,
 - 2) Pairing is done. You can now unplug the Dongle from the base unit.
- When LED indicator is blinking Green, it indicates:
 - 1) The Dongle is plugged in the laptop and initializing.
 - 2) Pairing/software upgrading of the Dongle in the Base Unit is in progress.
- When LED indicator is Off (no light), it indicates
 - 1) the Dongle is not plugged in the PC/Lap-top
 - 2) the Dongle is defective
 - 3) the USB port or computer might be defective.

Typical Application

