A LOS CONTRACTOR OF THE CONTRA

YOUR #1 CHOICE FOR CCTV CONNECTIVITY SOLUTIONS



CCTV

CONNECTIVITY SOLUTIONS

MuxLab's mission



Established in 1984


uxLab is a leading manufacturer of advanced signal distribution equipment with over 30 years of experience in the CCTV and security markets. Our goal is to lead with advanced technological connectivity solutions for transferring and extending IP, Analog or HD-SDI CCTV signals. We proudly design, engineer and test all of our products in Canada. Whether for a new installation using Cat5e/6 or Coax cabling, utilizing existing Coax infrastructure to upgrade to the latest IP cameras, or adding to an existing analog system, we have the solution you require.



Proud to be Canadian

MuxLab is proud to design and engineer its products in Canada, by Canadian professionals. We create jobs and support local manufacturing, something we're proud of today and every day.

Typical Application 500110

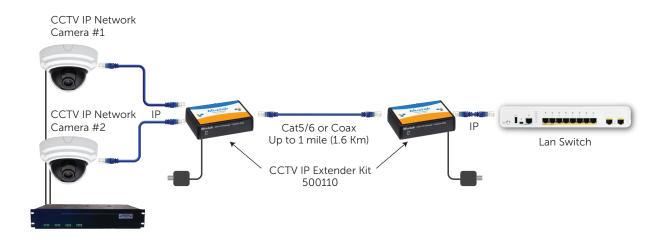

Typical Application 500111



IP Chart

PRODUCT	'S 500110	500111	500112	500112-30W	500114
Coax	Yes	Yes	Yes	Yes	Yes
Cat5e/6	Yes	-	-	-	-
PoE	N/A	14W	15.4W	30W	15.4W
Distance	1.5km	100m	300m	300m	1km
LAN	100m	3m	100m	100m	100m

IP over Coax Extenders

CCTV IP Extender Kit

Part # 500110



The CCTV IP Extender Kit (500110) allows any CCTV IP camera to be connected over extended distance via Cat5e or coax cable. The 500110 supports up to two IP cameras up to 650 ft (200m) at 100 Mbps and up to 1 mile (1.6km) at 25Mbps.

Application

Video production, broadcasting, HD camcorder, studio-to-studio, post-production, live events, medical imaging displays, mobile video, HD/SD routing, HD-CCTV, medical imaging

Key Features

Extend distance between IP camera and 10/100BaseT LAN



Supports up to two IP cameras via coax or Cat5e/6 (1 twisted pair)

Up to 650 ft (200m) @ 100Mbps

Up to 1 mile (1.6 km) @ 25Mbps



CCTV IP PoE Extender

Part # 500111, 500111-2PK



The CCTV IP PoE Extender (500111) allows one IP camera (14 Watts) to be connected up to 1600 ft (500 m) via a single 75-ohm coax cable in a point-to-point configuration. The product works in pairs and the power consumption is low enough so that it does not load the PoE source or switch. The maximum distance depends on the grade of coax cable and the power consumption of the camera.

Αpı	olic	atio	n

Campus, highways, airports, hotels, casinos, commercial complexes, remote parking lots, entry gates, self-storage, hospitals, car dealerships, prisons, network connections

Key Features

Used in pairs (sold separately or as 2-pack)

Connects IP PoE camera to 10/100BaseT PoE switch via single coax cable

Up to 330 ft (100m) @ 100Mbps @ 14W



Mode switch to select PoE Mode A or B

Does not require external PSU

Works with MuxLab mounting accessories



LongReach CCTV IP PoE Extender Kit

Part # 500112



The LongReach CCTV IP PoE Extender Kit (500112) allows one CCTV PoE IP camera (up to 15.4 Watts) to be connected up to 980 ft (300 m) via a single 75-ohm coax cable in a point-to-point configuration to a PoE LAN switch. If the LAN switch is not PoE, then the 48VDC Power Supply (500113) is required in order to power the PoE camera and the 500112. The maximum distance depends on the grade of coax cable and the power consumption of the camera.

Application	Campus, highways, airports, hotels, casinos, commercial complexes, remote parking lots, entry gates, self-storage, hospitals, car dealerships, prisons, network connections
Key Features	Supports one IP PoE camera via one coax cable
	Supports CCTV IP PoE cameras up to 15.4W
	Up to 980 ft (300m) via coax @ 100Mbps/15.4W



Up to 330 ft (100m) on the LAN connection

LED indicators for power, IP traffic, 100Mbps

Supports MuxLab mounting accessories (500900/902/910/915)



LongReach CCTV IP PoE Extender Kit, 30W

Part # 500112-30W



The Active HD CCTV Receiver Balun (500721) provides extended distance between an HD-SDI CCTV camera and an HD-SDI DVR via Cat5e/6 cable. The product supports up to 150 ft (45m) via Cat5e cable at HD (720p, 1080i) resolution when used in conjunction with MuxLab's HD CCTV Pass-Thru Balun (500720). Furthermore, the 500721 allows remote power and 2-wire PTZ control to be combined with HD-SDI video over the same Cat5e/6 for optimized cabling.

Application	Campus, highways, airports, hotels, casinos, commercial complexes, remote parking lots, self- storage, hospitals, car dealerships.	
Key Features	Supports one IP PoE camera via one coax cable	
	Supports CCTV IP PoE cameras up to 30W	
	Up to 980 ft (300m) via coax @ 100Mbps/30W6	1
	Up to 330 ft (100m) on the LAN connection	ith ?
	LED indicators for power, IP traffic, 100Mbps	
	Includes wall-mount brackets	2 7
		•

Power Supply for model 500112 (48VDC)

Part # 500113

LongReach CCTV IP PoE Extender Kit, 1KM


Part # 500114



The LongReach CCTV IP PoE Extender Kit, 1Km (500114) allows one IP camera (15.4 Watts) to be connected up to 3281 ft (1000m) via a single 75-ohm coax cable in a point-to-point configuration. The maximum distance depends on the grade and quality of coaxial cable.

Application	CCTV IP surveillance	
Key Features	Supports one IP PoE camera via one coax cable	
	Supports CCTV IP PoE cameras up to 15.4W	
	Up to 3281 ft. (1km) via coax @ 100Mbps/15.4W	J. 1
	LED indicators for power, IP traffic, 100Mbps	11.
	Includes wall-mount brackets	1 K to
	Supports MuxLab mounting accessories (500900/902/910/915)	7

Typical Application 500112

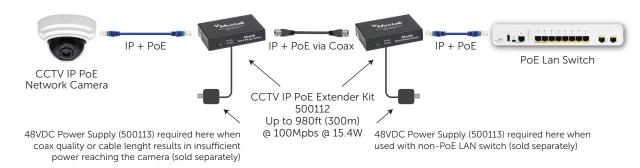



SDI & HD-SDI Baluns

HD-SDI Balun

Key Features

Part # 500701 500701-2PK



The HD-SDI Balun allows one HD-SDI signal to be transmitted up to 150 ft (45m) via Cat5e cable at HD resolution in a point-to-point configuration. The HD-SDI Balun supports transmission of up to 2.97/3.0 Gbps uncompressed, un-encrypted digital video (optionally including embedded Audio and/or Time Code) within television facilities and between professional video equipment.

Application	Video production, broadcasting, HD camcorder, studio-to-studio, post-pro-
	duction, live events, medical imaging displays, mobile video, HD/SD routing,

HD-CCTV, medical imaging displays, mobile video, hb/3b fouting

Supports SD and HD resolutions

Up to 150 ft (45m) via Cat5e cable @ HD

Up to 400 ft (120m) via Cat5e cable @ SD

Supports Cat5e/6 cable

Cast aluminum enclosure for EMI/RFI shielding

HD CCTV Pass-Thru Balun

Part # 500720



The HD CCTV Pass-Thru Balun (500720) allows one HD CCTV (HD-SDI) video channel plus remote power and PTZ control to be transmitted between the HD CCTV camera and the DVR via Cat5e/6 cable in the HD CCTV environment. The 500720 may be used in conjunction with either another 500720 or in conjunction with the 500720-CL or 500721.

Application	Campus, highways, airports, hotels, casinos, commercial complexes, remote
	parking lots, self- storage, hospitals, car dealerships.

Key Features HD-SDI video, power and PTZ over one Cat5e/6

Up to 100 feet (30m) @ HD-SDI (720p, 1080i) via Cat5e cable

Remote power powers the balun when present

Power supply required when no remote power

Used in pairs or with 500720-CL or 500721

Supports MuxLab mounting accessories (500900/902/910/915)



HD CCTV Pass-Thru Balun with Cable Leads



Key Features

The HD CCTV Pass-Thru Balun with Cable Leads (500720-CL) allows one HD CCTV (HD- SDI) video channel plus remote power and PTZ control to be transmitted between the HD CCTV camera and the DVR via Cat5e/6 cable in the HD CCTV environment. The 500720-CL is used in conjunction with either another 500720-CL or in conjunction with the 500720-CL or 500721.

Application	Campus, highways, airports, hotels, casinos, commercial complexes, remote
	parking lots, self- storage, hospitals, car dealerships.

HD-SDI video, power and PTZ over one Cat5e/6

Supports SD and HD (720p, 1080i)

Works in pairs or with 500720 or 500721

Supports Cat5e/6 cable





The Active HD CCTV Receiver Balun (500721) provides extended distance between an HD-SDI CCTV camera and an HD-SDI DVR via Cat5e/6 cable. The product supports up to 150 ft (45m) via Cat5e cable at HD (720p, 1080i) resolution when used in conjunction with MuxLab's HD CCTV Pass-Thru Balun (500720). Furthermore, the 500721 allows remote power and 2-wire PTZ control to be combined with HD-SDI video over the same Cat5e/6 for optimized cabling.

Application	Campus, highways, airports, hotels, casinos, commercial complexes, remote parking lots, self- storage, hospitals, car dealerships.
Key Features	Supports HD CCTV (HD-SDI)
	Supports up to 150 feet (45m) @ HD-SDI (720p, 1080i) via Cat5e cable
	Supports video, remote power and control over one Cat5e/6

Use in conjunction with 500720 or 500720-CL

LED diagnostics: power and SDI sync Supports MuxLab mounting accessories (500900/902/910/915)



Analog Baluns & Hubs

CCTV Modular Balun

Part # 500000



The CCTV Modular Balun allows a single composite CCTV video signal to be transmitted via a single unshielded twisted pair for more versatile security and surveillance cabling. Used in pairs, the CCTV Balun eliminates costly and bulky coax cable, allowing CCTV equipment to be connected to any convenient modular outlet. Ideal for CCTV installers, end-users and resellers. The CCTV Balun may also be used in conjunction with MuxLab's Audio-Video Hub (500200) for distribution to multiple monitors.

Key Features

Up to 2500 feet (760m) in B&W via Cat5e/6 twisted pair

Up to 2200 feet (670m) in color* via Cat5e/6 twisted pair



BNC coax to RJ45 modular

Compact design
Weather resistant

*Shorter distances may be achieved when used with DVRs.

CCTV Screw Terminal Balun

Part # 500009 500009-2PK



The CCTV Screw Terminal Balun allows a single composite CCTV video signal to be transmitted via a single unshielded twisted pair (UTP) cable for more versatile security and surveillance cabling. Used in pairs, the CCTV Balun eliminates costly and bulky coax cable, allowing CCTV equipment to be connected via cost-effective twisted pair. The CCTV Balun may also be used in conjunction with MuxLab's Audio-Video Hub (500200) for video distribution to multiple monitors.

Key Features

Up to 2500 feet (760m) in B&W via Cat5e/6 twisted pair

Up to 2200 feet (670m) in color* via Cat5e/6 twisted pair

Small enough to fit side-by-side on any video multiplexer

BNC coax to screw terminals



Polarity identification label

Cable strain relief

Weather resistant

^{*}Shorter distances may be achieved when used with DVRs.

CCTV Mini Balun

Part # 500023



The CCTV Mini Balun allows a single CCTV video signal to be transmitted via cost-effective unshielded twisted pair (UTP) cable. Used in pairs, the CCTV Balun eliminates costly and bulky coaxial cable, allowing CCTV security and surveillance equipment to be connected using standard structured cabling techniques for neater and more streamlined cabling. The flexible mini coax cable lead allows the product to fit neatly inside CCTV camera back boxes and dome camera enclosures. The CCTV Balun also works in conjunction with other MuxLab CCTV baluns such as the 500000, 500009 and 500015 for a complete cabling solution.

Key Features

Fits inside CCTV dome cameras and back boxes

Compatible with other MuxLab CCTV baluns





*Shorter distances may be achieved when used with DVRs.

CCTV Power-Thru Balun

Part # 500024



The CCTV Power-Thru Balun allows video and remote power to be transmitted via one 4-pair Cat5e/6 cable, thus eliminating the need to install multiple cables for more efficient cabling in the CCTV security and surveillance environment. The Power-Thru Balun may be used in pairs or in conjunction with standard twisted pair crossconnect devices and other MuxLab CCTV baluns such as the 500000, 500009, 5000023 and 500015.

Key Features

Combines video and remote power under one 4-pair Cat5e/6 cable for more efficient cabling



Video up to 2,200 ft (670m) via Cat5e/6 UTP*

Remote power up to 500ft (170m) @ 24VAC/5VA via three (3) twisted pairs

*Shorter distances may be achieved when used with DVRs.

Passive CCTV Hub

Part # 500130



The Passive CCTV Hub allows video, remote power and PTZ control to be transmitted via one 4 pair Cat5e/6 cable, thus eliminating the need to install multiple cables for more efficient cabling in the security video environment. There are two 16-port models: 500130; for coax video output and 500131; for twisted pair video output. The Passive CCTV Hub works in conjunction with the 500022, 500024, 500029, 500000, 500009, 500023 and 500015.

Key Features

Port switch to set Power-Thru or Pass-Thru mode



Pin configuration table on unit

Space efficient, rackmountable

LongReach™ II Active CCTV Receiver Balun

Part # 500124



The LongReachTM II Active CCTV Receiver Balun (500124) provides extended distance between the CCTV camera and the DVR via Cat5e/6 cable. The product features Auto Gain Control (AGC) and supports up to 5,000 ft. (1.5 km) via Cat5e/6 cable when used in conjunction with MuxLab's full range of passive CCTV baluns. The LongReach II also allows video, remote power and 2-wire PTZ control to be combined over Cat5e/6 cable and features ground loop isolation (GLI) for optimum video transmission.

Key Features

Automatic Image Adjustment (patent pending)

Up to 5,000 ft (1.5 km) via Cat5e/6 with passive balun at camera


Up to 7,000 ft (2.1 km) via Cat5e/6 with active balun at camera

Video, power and PTZ over one Cat5e/6

Auto Gain Control (AGC)

Auto Polarity Correction

Ground Loop Isolation (GLI)



LED diagnostics

Supports MuxLab mounting accessories (500900/902/910/915)



LongReach™ II Active CCTV Receiver Hub, 8 Ports Active CCTV Receiver Hub, 16 Ports


Part # 500126, 500127



The LongReach II Active CCTV Receiver Hub (500126 [8p], 500127 [16p]) provides extended distance between the CCTV camera and the DVR via Cat5e/6 cable. The hub features Auto Gain Control (AGC) and supports up to 5,000 ft. (1.5 km) via Cat5e/6 cable when used in conjunction with MuxLab's full range of passive CCTV baluns. The LongReach II Hub also allows video, remote power and 2-wire PTZ control to be combined over Cat5e/6 cable and features ground loop isolation (GLI) for optimum video transmission.

Key Features	8 (500126) or 16 (500127) channel analog CCTV hub
	Up to 5,000 feet (1.5 km) via Cat5e/6
	Up to 7,000 feet (2.1 km) via Cat5e/6 with 500100/101 at camera
	Video, power and PTZ over one Cat5e/6
	Auto Gain Control (AGC)
	Auto Polarity Correction
	Ground Loop Isolation (GLI)
ANALOG	LED diagnostics

Typical Application 500127

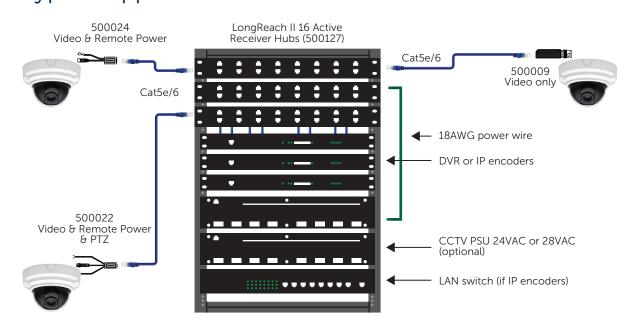



More Analog CCTV Baluns & Hubs



Part # 500007

PTZ Balun



Part # 500031

CCTV Modular Balun, RCA



Part # 500015

LongReach™



Part # 500022

CCTV Pass-Thru Balun



Part # 500024-CNV

CCTV Power-Thru Converter Balun



Part # 500029

CCTV Power-Thru Balun



Part # 500037

Quad Video Balun, BNC



Part # 500100, 500101

Active CCTV Transmitter Balun



Part # 500120, 500121

LongReach™ 16 Active CCTV Receiver Hub, UTP-UTP



Part # 500122, 500123

LongReach™ 16 Active CCTV Receiver Hub, UTP-CX



Part # 500132

CCTV Pass-Thru/GLI Balun



Part # 500133

Passive CCTV Hub/GLI Balun




Part # 500134

Passive CCTV Hub Plus



Part # 500136-US, 500136-UK, 500136-EUR

CCTV Power Integrator Hub, 24VAC

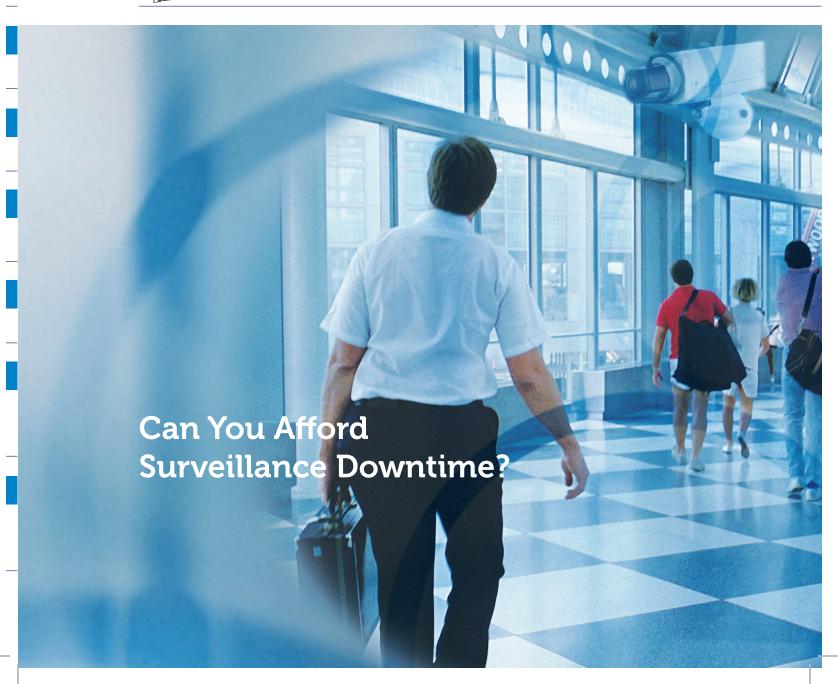

Accessories

3 100 Marine	Part # 500900
** Marketin	Rackmount Balun Chassis 16
Morlo	Part # 500902
	Rackmount Balun Chassis 6
	D + # 500005
**Market Section of Se	Part # 500905
	3 Port Rackmount Transceiver Chassis
	Part # 500906
	16 Port Rackmount Transceiver Chassis
	Part # 500907
	Filler module kit for 500906/909 (4)
	Part # 500908
	Bracket kit for models 500906/909 (4)
	Part # 500909
	16 Port Rackmount Powered
	Transceiver Chassis
000	Part # 500910
	Surface Mount Balun Plate






Part # 500915

Wall Mount Balun Fixture

Part # 500916

Surface Mount Transceiver Plate

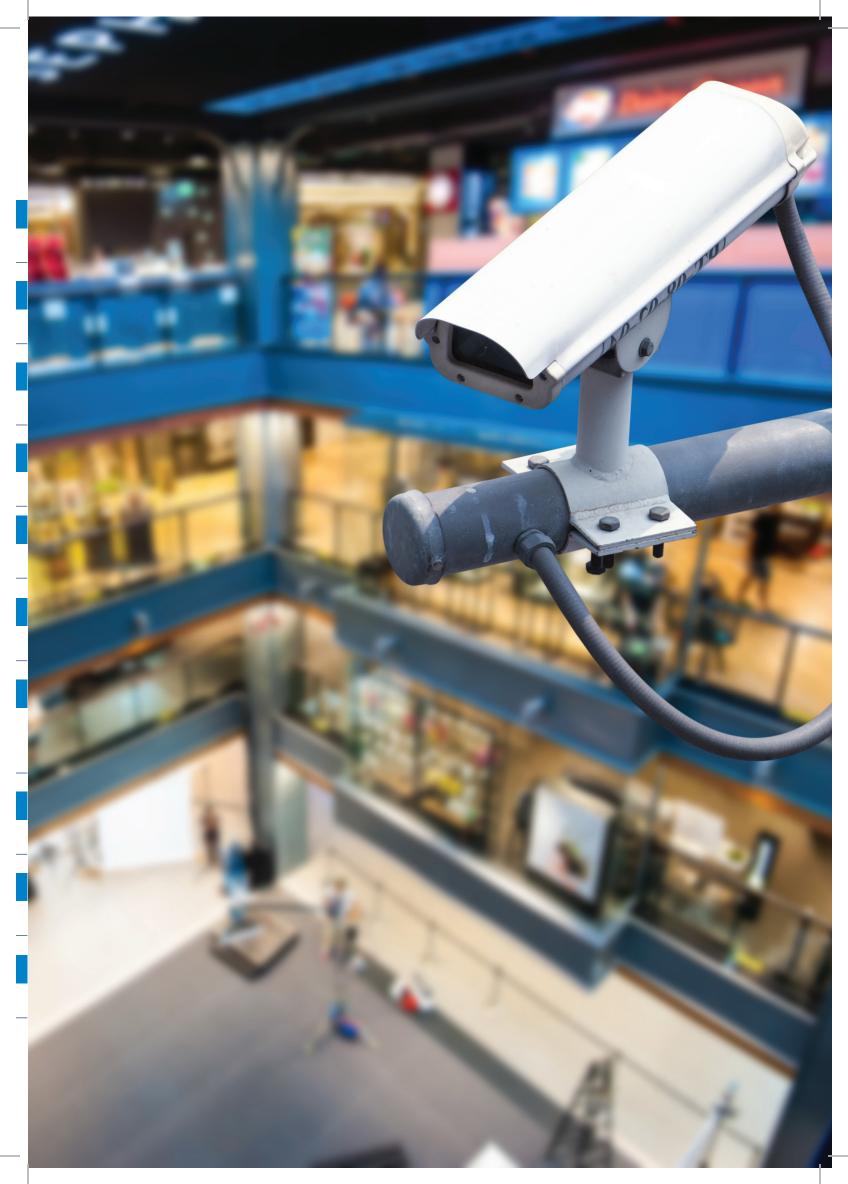


CCTV PART NUMBER Reference Guide

Part #	Description
500000, 500031	CCTV MODULAR BALUN, BNC / CCTV MODULAR BALUN, RCA
500007	PTZ BALU
500009, 500009-2PK	CCTV SCREW TERMINAL BALUN
500015	LONGREACH™
500022	CCTV PASS-THRU BALUN
500023, 500023-2PK	CCTV MINI BALUN
500024, 500029	CCTV POWER-THRU BALUN
500024-CNV	CCTV POWER-THRU CONVERTER BALUN
500037	QUAD VIDEO BALUN, BNC
500100 / 500101	ACTIVE CCTV TRANSMITTER BALUN
500111, 500111-2PK	CCTV IP POE EXTENDER
500112	LONGREACH CCTV IP POE EXTENDER KIT
500112-30W	LONGREACH CCTV IP POE EXTENDER KIT, 30W
500113	POWER SUPPLY FOR MODEL 500112 (48VDC)
500114	LONGREACH CCTV IP POE EXTENDER KIT, 1KM
500120, 500121	LONGREACH™ 16 ACTIVE CCTV RECEIVER HUB, UTP-UTP
500122, 500123	LONGREACH™ 16 ACTIVE CCTV RECEIVER HUB, UTP-CX
500124	LONGREACH II ACTIVE CCTV RECEIVER BALUN
500126	LONGREACH II ACTIVE CCTV RECEIVER HUB, 8P
500127	LONGREACH II ACTIVE CCTV RECEIVER HUB, 16P
500130	PASSIVE CCTV HUB
500132	CCTV PASS-THRU/GLI BALUN
500133	PASSIVE CCTV HUB/GLI BALUN
500134	PASSIVE CCTV HUB PLUS
500136-US, 500136-UK	PASSIVE CCTV POWER INTEGRATOR HUB
500136-EUR	CCTV POWER INTEGRATOR HUB, 24VAC
500701, 500701-2PK	HD-SDI BALUN
500720	HD CCTV PASS-THRU BALUN
500720-CL	HD CCTV PASS-THRU BALUN WITH CABLE LEADS
500721	ACTIVE HD CCTV RECEIVER BALUN

Muxiab: The Only Brand For All Your CCTV Connectivity Needs.



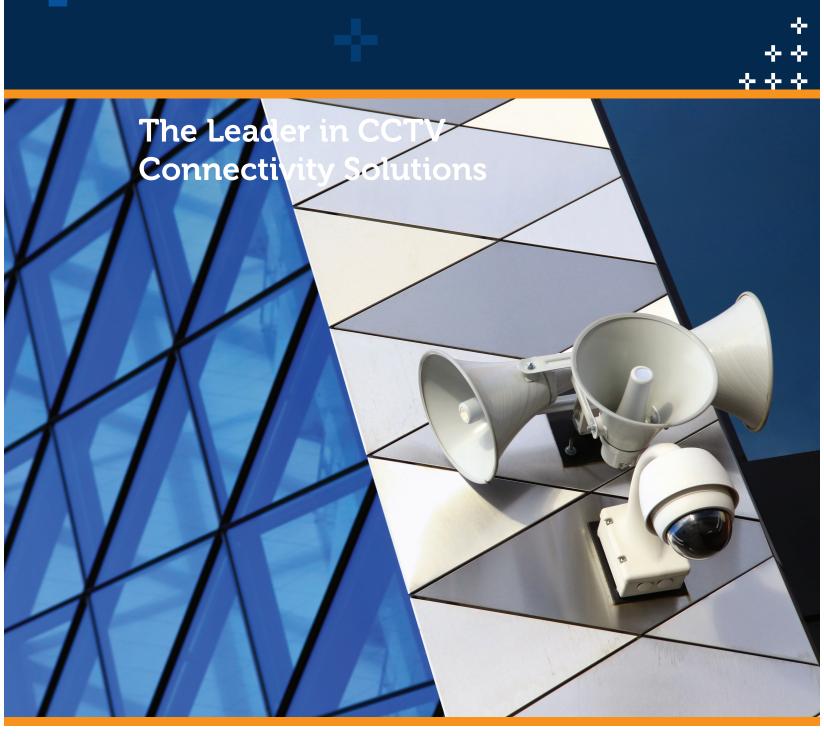



MuxLab Inc.

8495 Dalton Road, Montreal, Quebec, Canada, H4T 1V5

Tel: (514) 905-0588 Fax: (514) 905-0589 Toll Free: 1-877-689 5228 E-mail: videoease@muxlab.com

www.muxlab.com





