

Specifications

Environment	Digital Audio, Dolby Digital, DTS or LPCM
Devices	DVD, CD Players, TV, PC, laptops.
Transmission	Transparent to the user
Signals	Dolby Digital, DTS & 2 channel LPCM
Connectors	One (1) Coaxial connector One (1) TOSLink Connector. Two (2) RCA Connectors. <i>Note: Audio cables not included.</i>
Switch	Selects between SPDIF and TOSlink
Distortion	<0.001% @ 1KHz
SNR	> 90 dB (20Hz – 20 KHz)
Sample Rate	32, 44.1, 48 and 96 KHz
Bit Depth	24 bit S/PDIF compress & uncompress bitstream
Power Supply	One (1) 110-240V/5VDC power supplies with interchangeable blades
Power Consumption	2.05 Watt
Temperature	Operating: 0° to 40°C Storage: -20° to 85°C Humidity: Up to 95% non-condensing
Enclosure	ABS fire retardant plastic
Dimensions	2.4" x 2.25" x 1.0" (6.1 x 5.5 x 2.5 cm)
Weight	1.0 lb (0.45 kg)
Compliance	Regulatory: FCC, CE, RoHS Flammability: 94V0
Warranty	2 years
Order Information	500088 Digital Audio Converter, Dolby & DTS

Trademark acknowledgments

All products or services names mentioned in this document may be trademarks of the companies with which they are associated.

Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories.

For DTS patents, see <http://patents.dts.com>. Manufactured under license from DTS licensing Limited. DTS, the Symbol, & DTS and the Symbol together are registered trademarks, and DTS 2.0+Digital Out is a trademark of DTS, Inc. © DTS, Inc. All Rights Reserved.



8495 Dalton Road, Mount Royal, Quebec, Canada. H4T 1V5

Tel: (514) 905-0588 Fax: (514) 905-0589

Toll Free (North America): (877) 689-5228

E-mail: videoease@muxlab.com URL: www.muxlab.com



Digital Audio Converter, Dolby & DTS 500088

Quick Installation Guide

Overview



The Digital Audio Converter, Dolby & DTS (500088) converts one LPCM-encoded, one DTS or one Dolby Digital coaxial (S/PDIF) or optical (TOSLink) digital audio signal to a standard left/right analog audio output, thereby allowing a digital audio source such as a DVD or CD player without RCA analog audio output to be connected to an audio-video receiver or TV.

Applications

Applications include commercial and residential audio systems, boardroom systems, collaborative PC systems, and medical information systems.

Installation



1. Identify the connectors on the Digital Audio Converter as indicated on the product panels.



2. To install the Digital Audio Converter:
 - 2a. Connect the converter input to the digital audio source with an Optical (TOSLink) or 75-ohm coaxial (S/PDIF) cable.
 - 2b. Set the input switch to the appropriate signal.
 - 2c. Connect the converter output to the analog audio receiver with a stereo audio compliant cable.
3. Connect the 5 VDC power supply to the converter first, and then plug the power supply into an AC power outlet. If power is present, the green power LED of the Digital Audio Converter will be ON.

Note: Power-on the Digital Audio Converter only after all connections are made.

4. Power-on the audio source and receiver and verify the audio quality.
5. The following diagrams shows the final configuration.

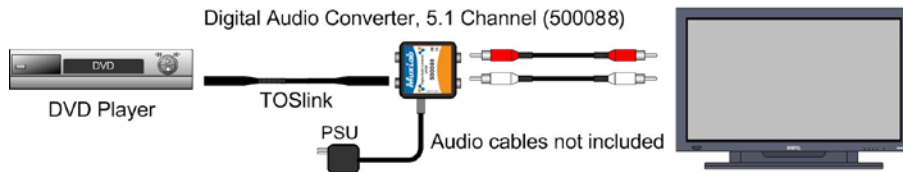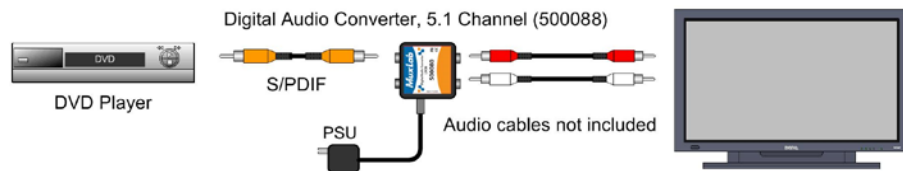

Troubleshooting

The following table describes some of the symptoms, probable causes and possible solutions in regard to the installation of the Digital Audio Converter:

Symptom	LEDs		Probable Cause	Possible Solutions
	Power	Lock		
No Sound	OFF	OFF	No power	• Check power connections
No Sound	ON	OFF	Optical/Coaxial Cable	• Check the Optical/Coaxial cables.
No Sound	ON	ON	Stereo audio cable	• Check the stereo audio cable.
No Sound	ON	ON	Wrong input on receiver	• Check if the selected input on the receiver can receive analog stereo audio.
No Sound	ON	ON	The Audio source is set to 7.1 channels of audio, which is not supported through the Toslink or Coax connection	• Set the audio source to 2CH LPCM or 5.1 Bitstream digital audio which is supporting Dolby digital and DTS
Choppy sound	ON	ON	Weak Connections	• Check cable connection • Check the Optical/Coaxial Cable Quality.

If you still cannot diagnose the problem, please call MuxLab Customer Technical Support at 877-689-5228 (toll-free in North America) or (+1) 514-905-0588 (International).