

Overview:

The HDMI 1x4 Splitter (500421) allows one (1) HDMI source to be distributed to up to four (4) HDMI displays. The splitter supports up to 4K (3840 X 2160), 8-bit color and HD audio. The splitter is HDCP 1.3 compliant and features LED diagnostics. Additionally, all HDMI connectors are on the rear panel for neater cabling. Applications include; commercial and residential AV systems, classroom projector systems, digital signage, boardroom systems, collaborative PC systems, medical information systems.

Applications:

Commercial and residential AV systems Classroom training systems Digital signage Boardroom systems Medical video systems





Key Features:

- Distribute one HDMI source to four displays
- Support up to 1080p @ 60Hz, Deep Color 12bit
- Supports up to 4K resolution @ 30Hz
- Support Dolby TrueHD and DTS-HD Master Audio
- Support 3D
- LED diagnostic
- HDMI 1.4
- HDCP 1.3 compliant


Environment	HDMI 1.4 (3D)
Devices	DVD/Blu-Ray, plasma, projectors, monitors, TV, PC, laptops
Transmission	Transparent to the user
Frequency	25 to 340 MHz
Signals	HDMI 1.4 protocol
Connectors	1 HDMI Type A Input
	4 HDMI Type A Output
LEDs	Power: Green
	Input & Output Link: Blue
Resolution	480i to 1080p @ 50/60 FPS
	1080p @ 24/50/60 FPS
	3840 X 2160 @ 24/25/30 FPS
	VGA to UXGA
Color	8, 10 & 12 bit
Audio	LPCM 7.1CH, Dolby TrueHD and DTS-HD Master Audio
HDCP	Revision 1.3
Cable	HDMI Cable
Temperature	Operating: 0° to 40°C Storage: -20° to 60°C
	Humidity: up to 90% non-condensing
Enclosure	Metal enclosure
Dimensions	6.06" x 2.76" x 1.00" (154 mm x 70 mm x 25 mm)
Weight	1.4 lbs (0.64 Kg)
Compliance	Regulatory: FCC, CE, RoHS
Warranty	2 years
Order Information	500421 HDMI 1X4 Splitter, UHD-4K (UPC: 627699004210)

© MuxLab Inc. 2014 HDMI 1x4 Splitter, UHD-4K





Typical Application

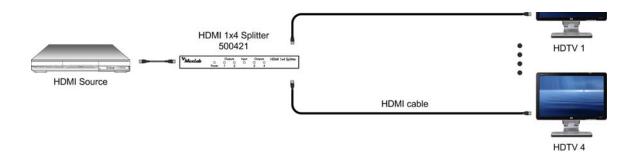



Rear Panel

Toll Free:1 877 689-5228 E-mail: videoease@muxlab.com

www.muxlab.com