



Overview

The HDMI to VGA Adapter allows an HDMI source such as a PC or laptop to be connected to an existing VGA display or projector.

Applications

Commercial AV systems, classroom projector systems, boardroom systems, collaborative PC systems.

Key Features


- Converts HDMI to VGA
- Supports DVI when used with DVI to HDMI cable
- Compliant with HDMI 1.3, DVI 1.0
- Supports up to 1080p and 1920x1200
- Supports 8/10/12bit deep color, up to 2.25GHz
- HDCP Compliant
- No external power required
- Includes a pigtail for convenient connectivity in tight spaces

Specification Chart	
Environment	HDMI 1.3, DVI 1.0, VESA VGA
Devices	DVD players, Blu-ray players, Media players, projectors, monitors, TVs, PCs, laptops, servers.
HDCP	Compliant
Maximum Resolution	1080p, 1920x1200
Transmission	Transparent to the user
Standard	HDMI 1.3, VESA VGA
Connectors Cables not included.	Input: One (1) Male HDMI (Type A) cable lead Output: One (1) Female VGA (D-SUB 15 pin) connector
Cable Length	3.9" (9.85 cm)
Power	No external power required
Temperature	Operating: 0° to 40° C. Storage: -20° to 85° C. Humidity: up to 90% non-condensing.
Enclosure	Plastic
Unit Dimensions	7.87" x 1.73" x 0.59" (200 x 44 x 15 mm)
Shipping Weight	0.13 lbs (0.057 kg)
Compliance	Regulatory: FCC, CE, RoHS
Warranty	1 year
Order Information	100514 HDMI to VGA Adapter (UPC: 627699505144)

© MuxLab Inc. 2020 100514



Typical Application Schematic

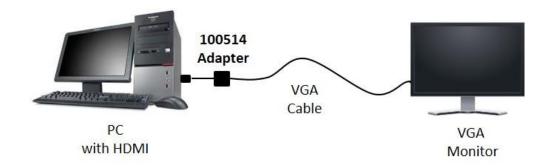



© MuxLab Inc. 2020 100514