



## USB-C 3.2 Gen1 4-Port Extender Kit, 100m

500534

### Overview

The USB-C 3.2 Gen1 4-Port Extender Kit, 100m (model: 500534) enables USB 3.2 Gen1 connectivity at data rates up to 5Gbps & extends true USB up to 100m (328ft) over standard Cat6a UTP. Transmitter features with one USB-C 3.2 Gen1 three local (One USB-C and two USB-A) input, one FSYNCR GPIO input and one RS-232 pass-through. Receiver features with four USB 3.2 Gen1 (Two USB-C and Two USB-A) outputs, one FSYNCR GPIO output and one RS-232 pass-through. The device also supports 24V Bi-directional PoC.

The USB-C 3.2 Gen1 4-Port Extender Kit, 100m is true plug and play, requires no additional software drivers, and is compatible with all major operating systems. The unit supports a wide variety of USB extension applications including security, industrial control, digital signage, scientific data acquisition and other implementations of USB standards.

### Applications

- Conference Rooms
- Classroom Projector Systems
- Collaborative PC Systems
- Digital Signage
- Educational Institutions
- Boardroom Systems


### Key Features

- Extension of USB 3.2 Gen1 up to 100m/328ft over CAT6a cable
- USB 3.2 Gen1 connectivity with data transfer rate up to 5Gbps
- Backwards compatible with USB 2.0 and USB 1.1
- Hardware acceleration for isochronous and bulk transfer
- USB-C and USB-A Ports supports 5VDC up to 1.5A and 1A on the Receiver
- Support RS-232 pass-through and FSYNCR GPIO pass-through (for industry camera use)
- Support bi-directional 24VDC PoC
- Simple plug and play, no driver and setting installation required

# Specification

Technical	
USB Protocol	USB 3.2 Gen1
Transmission Rate	Up to 5Gbps
Network Bandwidth	10G
Transmission Distance	100m/328ft over CAT6a (F/FTP) cable
ESD Protection	IEC 61000-4-2: ±8kV (Air-gap discharge), ±4kV (Contact discharge)
Connection	
Transmitter	Input: 1 × USB HOST [USB-C, 24pin Female] Output: 1 × USB-C DEVICE [USB Type C, 24-pin female] 2 × USB-A DEVICE [USB Type A, 9-pin female] 1 × HDBT-USB3 [RJ45 connector, 24V PoC] Control: 1 × RS-232 [3pin-3.5mm Phoenix Connector] 1 × FSYNC [1pin-3.5mm Phoenix Connector] 1 × SERVICE [USB-C, Update Port]
Receiver	Input: 1 × HDBT-USB3 [RJ45 connector, 24V PoC] Output: 2 × USB-A DEVICE [USB Type A, 9-pin female] 2 × USB-C DEVICE [USB Type C, 24-pin female] Control: 1 × RS-232 [3pin-3.5mm Phoenix Connector] 1 × FSYNC [1pin-3.5mm Phoenix Connector] 1 × SERVICE [USB-C, Firmware Update Port]
Mechanical	
Housing	Metal Enclosure
Color	Black
Dimensions	Transmitter / Receiver: 85mm [W] × 100mm [D] × 25.5mm [H]
Weight	Transmitter: 265g, Receiver: 275g
Power Supply	Input: 100~240VAC 50/60Hz Output: 24VDC/3.75A
Power Consumption	PoC Power Supply: 68W (Max)
Operating Temperature	0°C ~ 40°C / 32°F ~ 104°F
Storage Temperature	-20°C ~ 60°C / -4°F ~ 140°F
Relative Humidity	20~90% RH (non-condensing)
Generic Specification	
Warranty	2 years
Order Information	500534 USB-C 3.2 Gen1 4-Port Extender Kit, 100m (UPC: 627699005347)

# Application Example

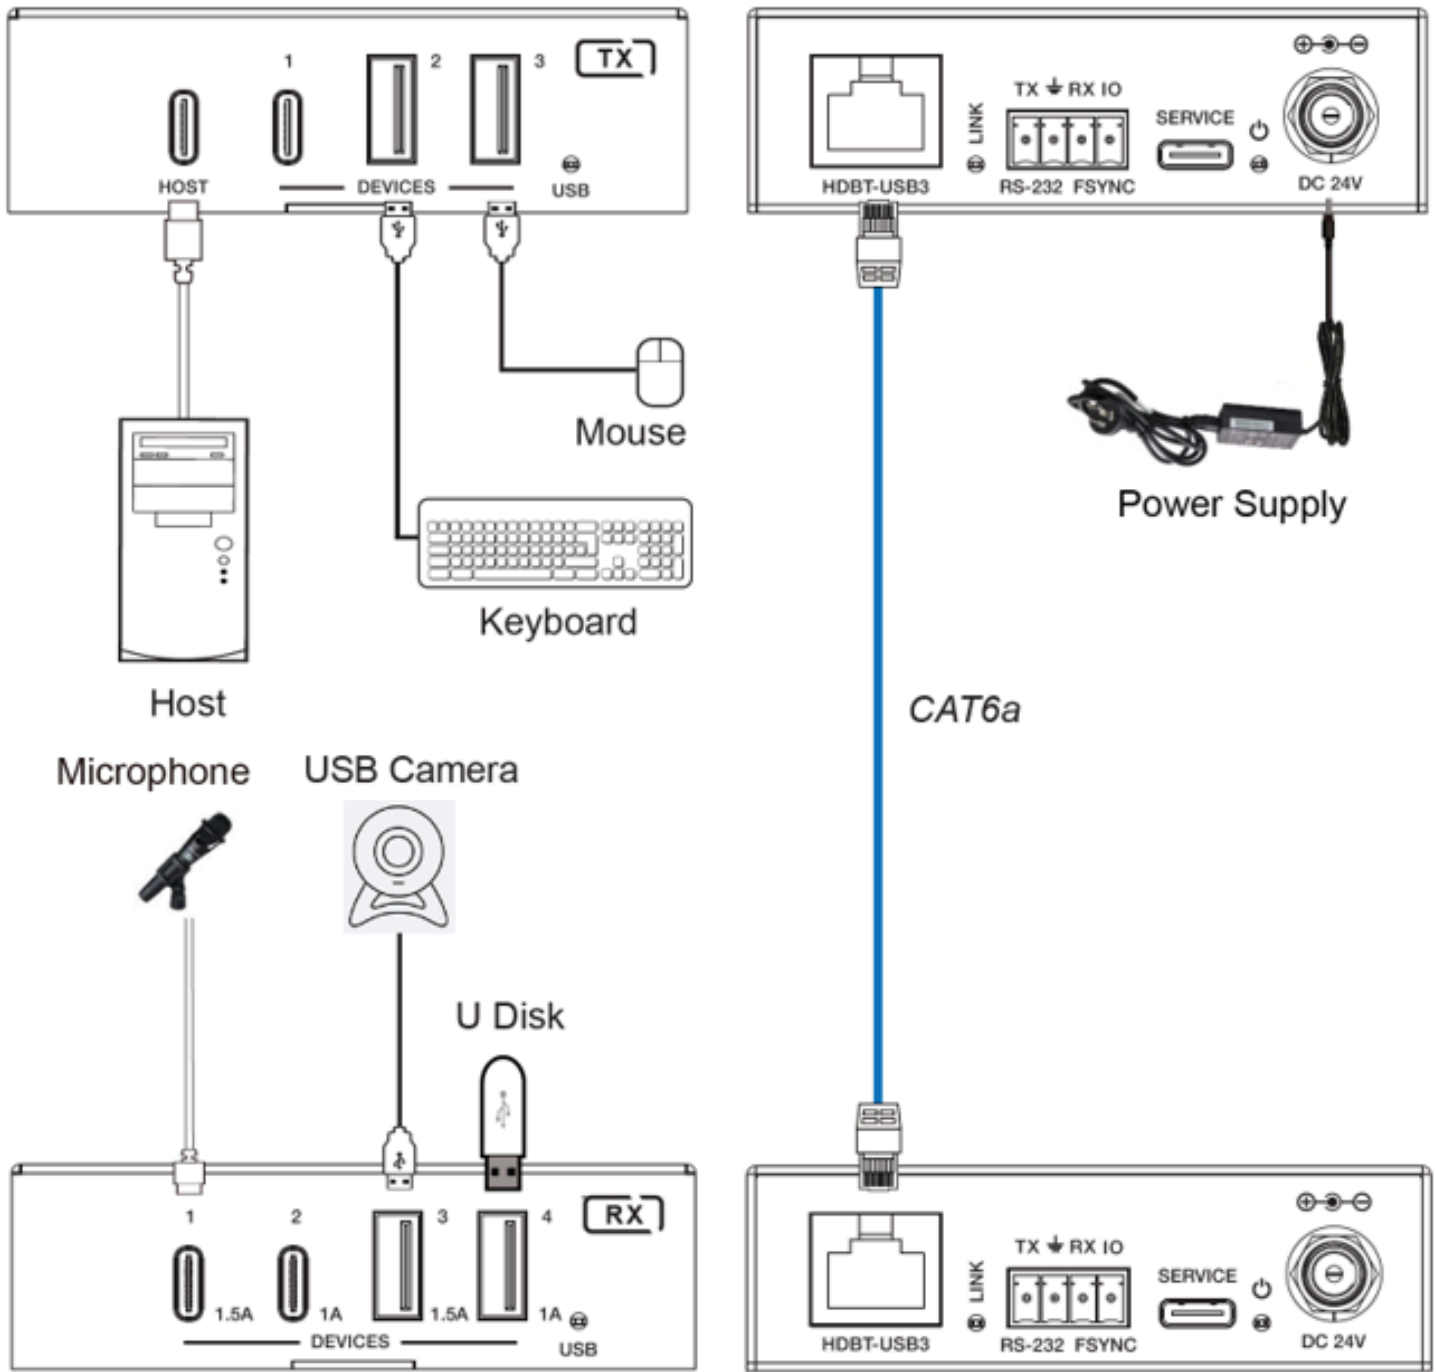

USB-C 3.2 Gen1 4-Port Extender Kit, 100m  
500534

Follow us:    

2321 Cohen | St-Laurent, H4R 2N7 | Québec, Canada Tel: 514-905-0588 | Fax:  
514-905-0589 | Toll free: 1-877-689-5228 info@muxlab.com |  
salesteam@muxlab.com | www.muxlab.com