



Dante Ceiling Speaker PoE, 40W 500221



Product Illustration

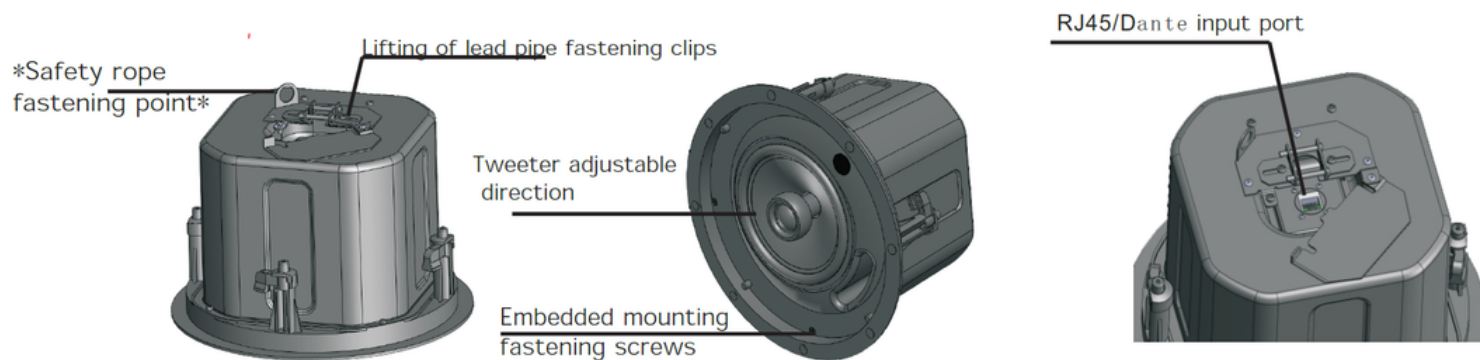

Product size chart

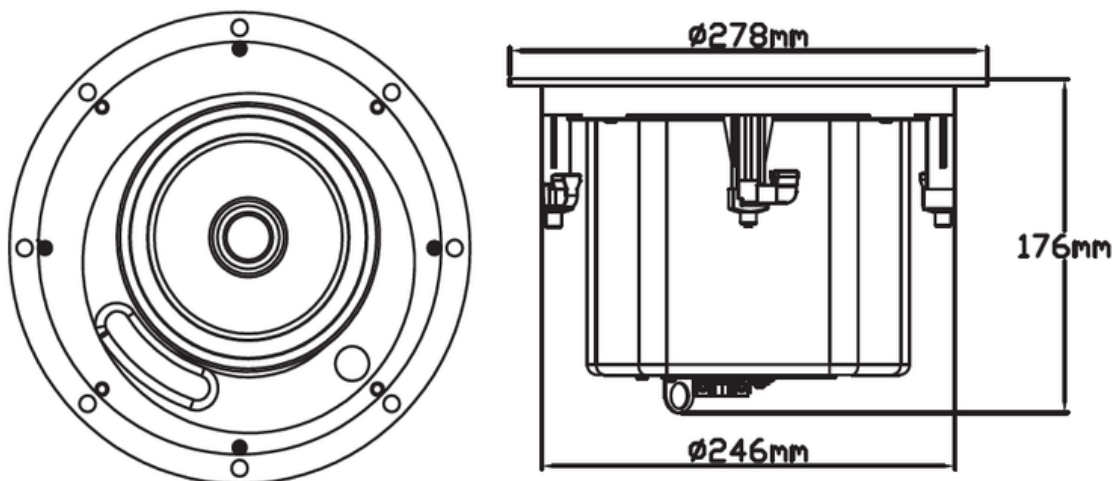

Specification

Audio Features

Environment	Custom audio systems in a structured cabling environment.
Application	Head-end installations, retail store, shopping center
Frequency Response	90 Hz ~ 16KHz
Audio Input	Dante Audio via Ethernet
Peak Power	40W
Sensitivity	89dB @ 1m, 111dB maximum
Driver Specifications	1 x HF:1" pivoting silk dome; 1 x LF:6.5" Coaxial unit
Dante Audio Protocol	Routing via Dante Controller Software
Build-in Function	DSP, Dante, Amplifier and PoE module
DSP Function	Gain, Mute, 5-Band PEQ, Limiter



Hardware Interfaces

Network Interface	1 x RJ45 port for PoE & Dante audio
Installation Mode	Pole and embedded mount installation



General

Shell Material	Metal
Hanging Method	Build-in buckle (security cable included)
Power Supply	PoE+ (IEEE 802.3at/bt)
Power Consumption	75W Maximum
Temperature	Operating: 0° to 45°C Storage: -40° to 60°C Humidity: Up to 90% non-condensing
Dimensions	Φ278 mm x 176 mm
Weight	2.8 Kg
Compliance	Regulatory: FCC, CE, RoHS,
Warranty	2 Years
Order Information	500221 Dante Ceiling Speaker PoE, 40W (UPC: 627699002216)

Support diagram

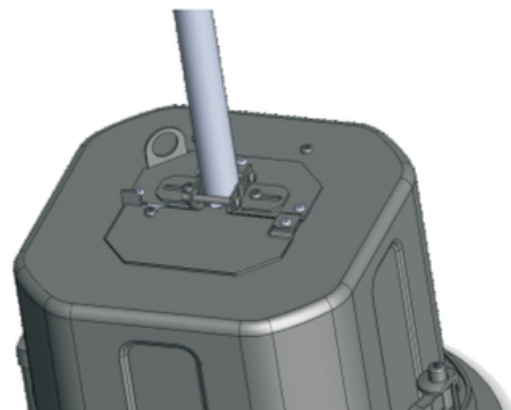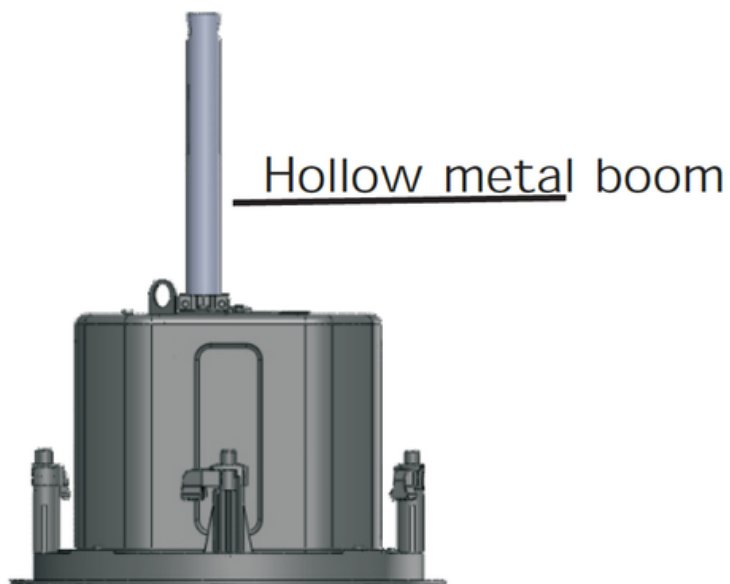

Embedded installation diagram

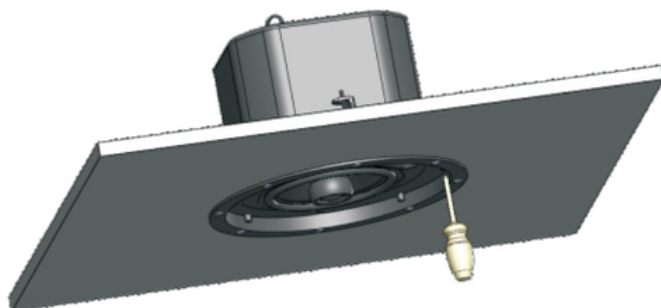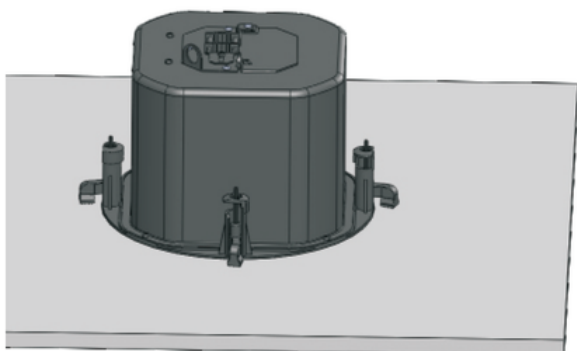

Dante Ceiling Speaker PoE, 40W
500221

Follow us: [f](#) [t](#) [in](#) [v](#)

2321 Cohen | St-Laurent , H4R 2N7 | Québec, Canada Tel: 514-905-0588 | Fax:
514-905-0589 | Toll free: 1-877-689-5228 info@muxlab.com |
salesteam@muxlab.com | www.muxlab.com